


Installation



- 1 Ensure the brass adapter ring provided with the device is installed.
- 2 Slowly lower the sensor into the free tank inlet hole.
- 3 Slowly screw the device into the inlet taking care not to over-tighten. Ensure the device is in enough so as the lid can close without touching.

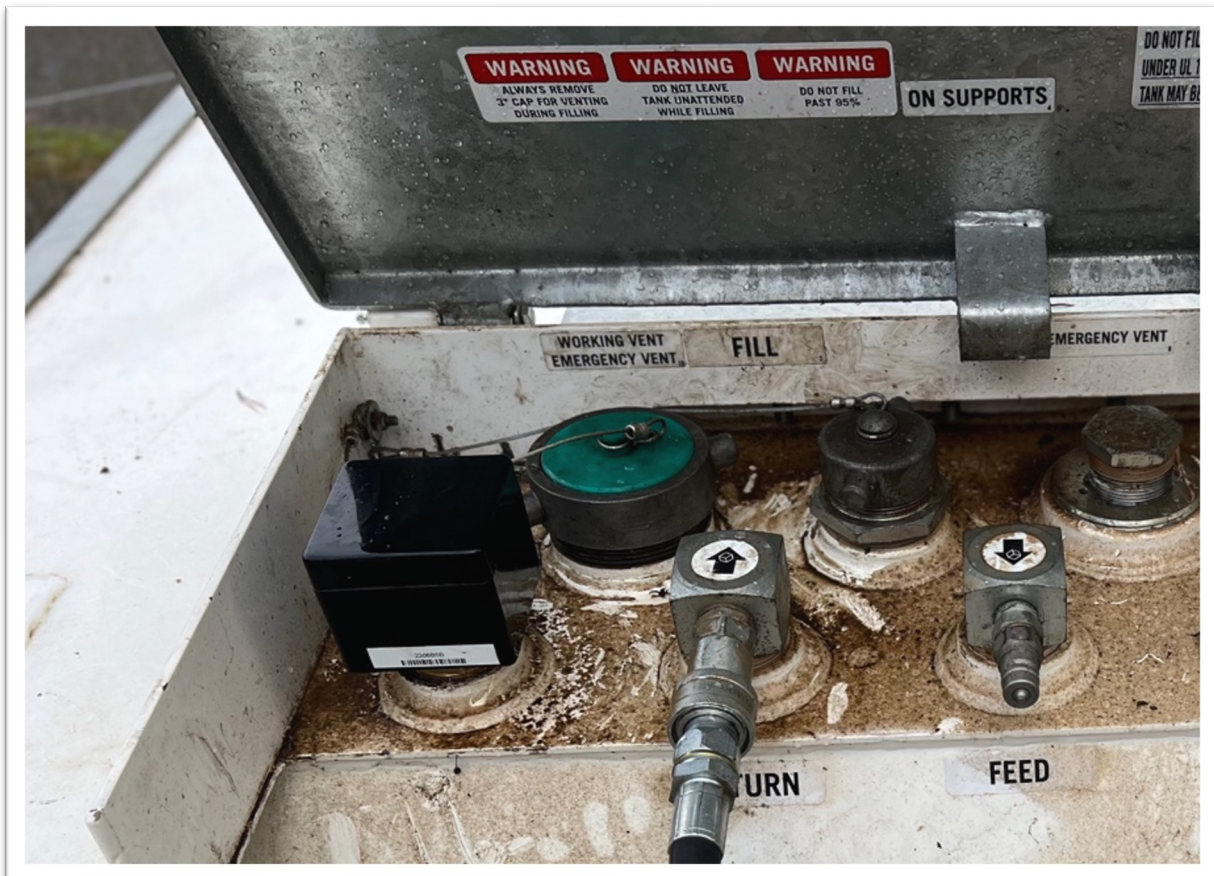

Activation

Press and hold button
(3 Seconds)
until the green light
flashes




Once activated the Red
light will start to flash
gradually slowing down



When connected to the
network the device will
flash Green again to
confirm



Registration

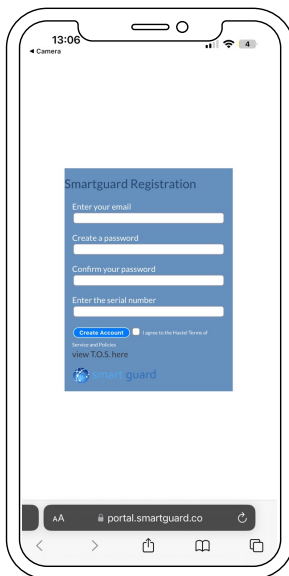

- To register your device go to; www.smartgaurd.co
- When registering add your email address, create a password and enter the serial number (found on the unit) and press create account.
- You will then be taken to a portal home page, where you will find your tabs.
- Click on view reports, then See **Setup**.
- Here, add in the tank type, tank volume, tank height, install type and so on.
- Add in your account details here such as email address for monitor reminders etc.
- Once all the information is entered **press save** and your unit is set up.